



## **Bistro Systems**

[www.bistro-bar.com](http://www.bistro-bar.com)

Bistro Systems LLC  
1660 S. Highway 100, Suite 500  
St. Louis Park, MN 55416  
email: [info@bistro-bar.com](mailto:info@bistro-bar.com)  
phone: 612-355-1303

### **Set-upguide**

created by  
**Bistro Systems**

[www.bistro-bar.com](http://www.bistro-bar.com)

Locking tubs




Step 7

Foot pump placement




Step 8-9

Coupler line connections

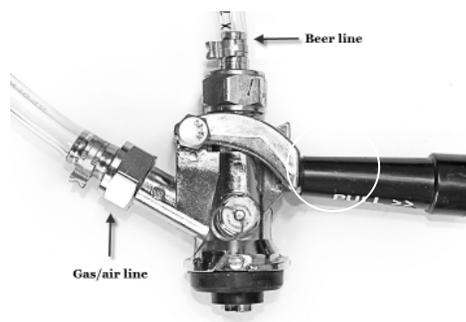

Step 10

Table hangar



Step 12

Beer line O-ring



Step 13  
O-Ring

### Set-up configuration:

1. Twist off table top counterclockwise.
2. Lift upper tub from lower tub and place it on the ground
3. Fill bottom tub with 2–3 inches of ice (first part of one 20 lb. bag).
4. Gently place keg inside lower tub on top of layer of ice.
5. Fill the space surrounding keg with ice (from remaining 20 lb. bag).
6. Take upper tub and flip it right-side-up so logo is readable. Turn it clockwise onto lower tub until completely closed/sealed and Bistro Bar logo is facing front, opposite the wheels.
7. Lock the lower tub with the upper tub. (See pic Step 7)
8. Unravel the foot pump air line and insert it into the hole in the upper tub located on the backside of the upper tub, opposite the Bistro Bar logo and should line up with lower tub wheels. (See pic Step 8-9)
9. Place foot pump near the base of the wheels on the ground. (See pic Step 8-9)
10. Connect the foot pump air line to the coupler on the side opposite the handle lever. Make sure the rubber backflow preventer does not fall out. (See pic Step 10)
11. Insert beer line through table top hole. Going clockwise, twist lock on the table top. Then, going clockwise, twist lock on the beer tower by lining up the holes in the table top with the adapter pin.
12. Twist off the table top counterclockwise and then hang the table top on the side of the Bistro Bar with the hanger found on the bottom side of the table top. (See pic Step 12)
13. Connect the beer line to the coupler via the hole that is closest to the coupler handle lever (the hole that is facing directly up). NOTE: O-ring may be required in case of beer leakage. (See pic Step 13)
14. Tap the keg by lining up the grooves on the coupler then press down and turn the coupler clockwise. **DO NOT** press down the coupler lever as you will get a beer bath.
15. Once the coupler has been fully installed, go ahead and press down the handle lever. This releases beer into the beer line.
16. Twist the table top back onto the Bistro Bar and lock table top on backside.

17. Bistro Bar is ready to dispense. Depending on how much the keg has moved around, the first pitcher may be a bit foamy.

### Storage configuration:

1. Unlock table top, remove it and hang on the side of Bistro Bar.
2. Untap the coupler from the keg by first lifting up the handle lever to close the keg from releasing any beer. Twist off the coupler counterclockwise and remove the coupler.
3. Remove the beer line and air line from the coupler. Cover the holes with the black rubber caps if the coupler came with them.
4. Through the hole, pull out the foot pump air line and wrap the line around the foot pump.
5. Remove the beer tower from the table top (may be easier to put the table top back on to remove the tower). Wrap the beer line around the tower. Place the table top on the ground and set the tower on the table top.
6. Unlock the bottom tub and upper tub. Remove the upper tub.
7. Remove the keg and empty the remaining ice/water.
8. Place the foot pump, coupler, beer tower inside the bottom tub.
9. Flip upper tub upside down and place over the bottom tub. Line up the inside locks and secure the locks inside.
10. Twist on the table top on top of the collapsed Bistro Bar and lock it.